


# YL240P-29b SERIES

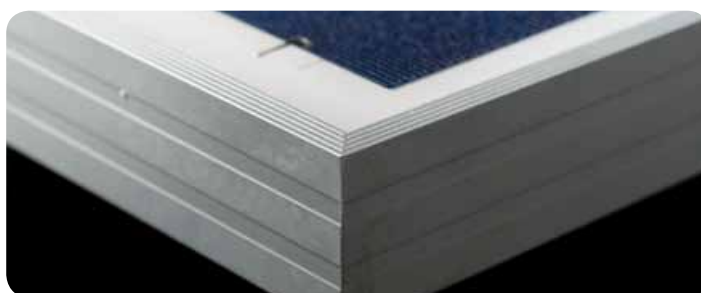

## WARRANTIES

5-year limited product warranty\*  
 Limited power warranty\*: 10 years at 90% of the minimal rated power output, 25 years at 80% of the minimal rated power output

## QUALIFICATIONS AND CERTIFICATES

IEC 61215 Ed. 2, IEC 61730 Class A, ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007, MCS, CE



## ABOUT YINGLI SOLAR

Yingli Solar is a vertically integrated manufacturer of solar photovoltaic modules. Under one roof we manufacture our ingots, wafers, cells and modules. This ensures that we can tightly control our material and production quality, offering our customers leading product durability and sustainable performance backed by our 25 year limited power warranty\*.

## PERFORMANCE

- » High efficiency, polycrystalline solar cells with high transmission and textured glass delivering a module series efficiency of up to 14.7%, minimising installation costs and maximising the kWh output of your system per unit area.
- » Power tolerance of +/-3% minimising PV system mismatch losses.

## QUALITY & RELIABILITY

- » Robust, corrosion resistant aluminium frame independently tested to withstand wind loads of 2.4KPa and snow loads of 5.4KPa ensuring a stable mechanical life for your modules.
- » Take confidence in our modules with a 5 year limited product warranty and a 25 year limited power warranty\*.
- » Modules protected by box during transportation and with 20 modules in a box on-site waste is minimised.
- » Modules independently tested to ensure conformance with certification and regulatory standards.
- » Manufacturing facility certified by TÜV Rheinland to ISO 9001:2008, ISO 14001:2004 and BS OHSAS 18001:2007.

\* In compliance with our Warranty Terms and Conditions



# YL240P-29b SERIES

## ELECTRICAL PARAMETERS

Electrical parameters at STC (1,000 W/m<sup>2</sup>, 25°C, AM 1.5 according to EN 60904-3)

| Module type                             |     | YL230P-29b | YL235P-29b | YL240P-29b |
|---|-----|------------|------------|------------|
| Power output                            | [W] | 230.0      | 235.0      | 240.0      |
| Power output production tolerances      | [%] | +/- 3      | +/- 3      | +/- 3      |
| Module efficiency                       | [%] | 14.1       | 14.4       | 14.7       |
| Voltage at Pmax, V <sub>mpp</sub>       | [V] | 29.5       | 29.5       | 29.5       |
| Current at Pmax, I <sub>mpp</sub>       | [A] | 7.80       | 7.97       | 8.14       |
| Open circuit voltage V <sub>oc</sub>    | [V] | 37.0       | 37.0       | 37.5       |
| Short circuit current I <sub>sc</sub>   | [A] | 8.40       | 8.54       | 8.65       |
| Limiting reverse current I <sub>r</sub> | [A] |            | 20         |            |
| Max. system voltage                     | [V] |            | 1,000 VDC  |            |

Electrical parameters at NOCT (800 W/m<sup>2</sup>, AM 1.5, wind velocity 1m/s, Tamb 20°C)

| NOCT (Nominal Operating Cell Temperature) | [°C] | 46 +/- 2 |      |      |
|---|------|----------|------|------|
| Voltage at Pmax, V <sub>mpp</sub>         | [V]  | 26.5     | 26.5 | 26.6 |
| Current at Pmax, I <sub>mpp</sub>         | [A]  | 6.28     | 6.41 | 6.56 |
| Open circuit voltage V <sub>oc</sub>      | [V]  | 33.8     | 33.8 | 34.2 |
| Short circuit current I <sub>sc</sub>     | [A]  | 6.80     | 6.92 | 7.01 |

### Thermal characteristics

|   |       |  |        |  |
|---|-------|--|--------|--|
| Temperature coefficient beta of I <sub>sc</sub>   | [%/K] |  | + 0.06 |  |
| Temperature coefficient alpha of V <sub>oc</sub>  | [%/K] |  | - 0.37 |  |
| Temperature coefficient gamma of P <sub>mpp</sub> | [%/K] |  | - 0.45 |  |

## MECHANICAL PARAMETERS

|  |                                  |  |  |
|--|----------------------------------|--|--|
| Dimensions (length [mm] / width [mm] / thickness [mm]) | 1,650 / 990 / 50                 |  |  |
| Frame height [mm]                                      | 50                               |  |  |
| Weight [kg]  | 19.8                             |  |  |
| Front cover (material / thickness [mm])                | Tempered Glass, 3.2mm            |  |  |
| Cell type (quantity / technology / dimensions)         | 60 / Polycrystalline / 156 x 156 |  |  |
| Encapsulation materials                                | Ethylene Vinyl Acetate (EVA)     |  |  |
| Rear cover (material)                                  | Laminated Polymer Plastic        |  |  |
| Frame (material)                                       | Robust Anodized Aluminum Alloy   |  |  |

### Junction box, cable & connector configurations



|   | Each configuration (CIXI/YITONG) is available with 2 different connector types each |                 |                             |                 |
|---|---|-----------------|-----------------------------|-----------------|
| Junction box (manufacturer / protection degree)   | CIXI / IP65   |                 | YITONG / IP65               |                 |
| Junction box dimensions (length / width / thickness [mm])   | 151 / 122 / 25  |                 | 147 / 137 / 28              |                 |
| Positive cable & negative cable (manufacturer / length [mm] / cable cross-section [mm <sup>2</sup> ]) | CIXI / 1200(900) / 4.0  |                 | XINHONGYE / 1200(900) / 4.0 |                 |
| Connector (manufacturer / type / protection degree)   | CIXI / CIXI / IP67  | MC / MC4 / IP67 | YITONG / YT08-1 / IP65      | MC / MC4 / IP67 |

## OPERATING CONDITIONS

|  |              |
|--|--------------|
| Operating temperature [°C]   | - 40 to + 85 |
| Max. wind load / Max. snow load [Pa]   | 2.4K / 5.4K  |
| Reduction of efficiency from an irradiance of 1,000 W/m <sup>2</sup> to 200 W/m <sup>2</sup> (T <sub>module</sub> = 25 °C) according to EN 60904-1 | 5%           |

## PACKAGING

|  |                       |
|--|-----------------------|
| Number of modules per box              | 20                    |
| Box size (length / width / depth [mm]) | 1,710 / 1,150 / 1,190 |
| Box Gross weight in kg                 | 450                   |
| Boxes per pallet                       | 1                     |

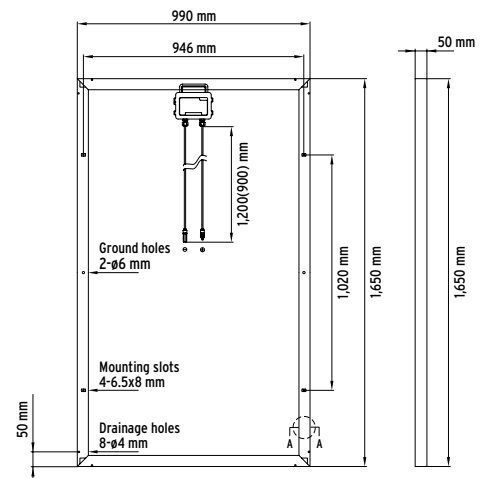

Electrical equipment, check with your installer

Before installation, please check the installation manual provided with the product.

Yingli Green Energy Holding Co. Ltd.  
commerce@yinglisolar.com  
0086 - (0)312 - 8929802

www.yinglisolar.com